


Technical Data Sheet

G-EF edge bead

G-EF edge bead for board ending and connection (gypsum board, OSB etc.)
for board thickness 12.5 mm and fixation to window or door frame

Material:

- PVC
- Adhesive foam tape

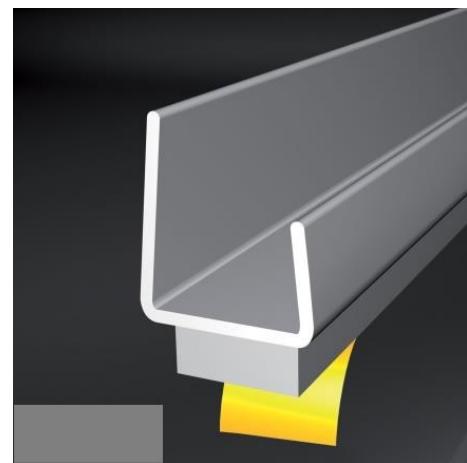

Features:

- For board thickness 12.5 mm
- Elastic adhesive tape for board connection for example to door or window frame where permanently elastic joint is required
- Aesthetic board connection
- Not requiring detail finishing

Instruction for use:

The window or door frame for the tape application must be cleaned first to remove dust, impurities and grease. Place the profile on the board edge, remove the protective tape and press to the frame.

Packaging, storage and transport:

Store in a dry place in horizontal position to prevent the profile sagging and deformation.

Certification:

The product is subject to any harmonized standard. The product was voluntarily certified at TZÚS Praha, s.p., The product is certified with certificate number 060-040966.



Technical data:

Material	PVC
Colour	White
Wall thickness [mm]:	0.9-1.1
Bead length [mm]:	2500, 3000
Front edge height [mm]:	10
Rear edge height [mm]:	20

Issued on 1 February 2016.

This update invalidates all previous versions of this technical data sheet. The specified product dimensions are nominal and may range within the permitted manufacturing tolerances.